


TECHNICAL SPECIFICATION

LED EMERGENCY LIGHT

XL88

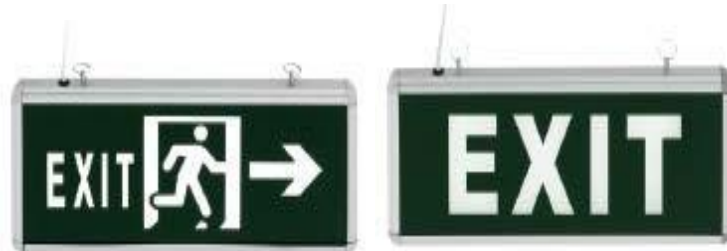

Technical data

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	3W;
<i>Battery:</i>	2x4V/900mAh Ni-Cd
<i>Full charging time:</i>	up to 24 hours
<i>Operating time:</i>	up to 3 hours
<i>LED source:</i>	LEDs diam. 5
<i>Body:</i>	Aluminum frame
<i>Diffuser:</i>	Glass with printed green signs
<i>Protection against dust and moisture:</i>	IP21

TECHNICAL SPECIFICATION


Features

- o Clearly indicates directions to emergency exits in panic situations
- o Automatic switch-on in case of power failure
- o Low power consumption

Area of application

- o Public buildings
- o Commercial buildings
- o Administrative buildings
- o Residential buildings
- o Banks
- o Hospitals
- o Schools

Variants and Dimensions

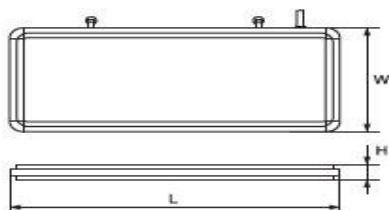


XL88

Model	LED chip lumens	Whole fixture lumens	Watt	Colour temp.	Colour body	Size (mm)			Catalogue number
						L	W	H	
	(lm)	(lm)		(K)					
XL88 LED DOUBLE FACE	6	35	3W	6200-6500	white	360	150	25	9XL88LED
XL88A LED ONE FACE ONLY	6	35	3W	6200-6500	white	360	150	25	9XL88ALED

TECHNICAL SPECIFICATION

Energy efficiency

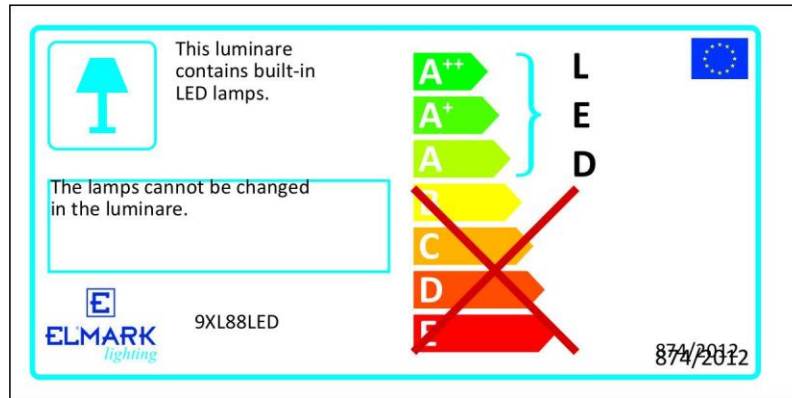

Standards

- EN 55015 ● EN 61000-3-2 ● EN 61000-3-3 ● EN 61547 ● EN 60598-1 ● EN 60598-2-4 ● EN 60598-2-22 ● EN 13032-4 ●

