

LED GROUND FIXTURE GRFLED068



TECHNICAL SPECIFICATION

FACADE AND GROUND

Technical data:


- Rated voltage: 100-240V / 50-60Hz
- Power: 1.2W
- LED source: Epistar
- Colour temperature: 6000-6500K
- Material: 304 Stainless steel
- Body colour: Grey
- IK Rating: IK10
- Insulation class III
- Protection against dust and moisture: IP67



Features:

- Modern and stylish design
- Durable in ground LED lights
- Made from 304 stainless steel, it is durable with a strong resistance to pitting and rusting.
- Corrosion proof
- Highly efficient replacement of conventional lighting fixtures
- Long-life and efficient
- Economic- low power consumption
- Environmentally friendly - no mercury and lead
- Ideal for edging and highlighting areas of the garden such as decking, steps, and patio areas


Variants and Dimensions:

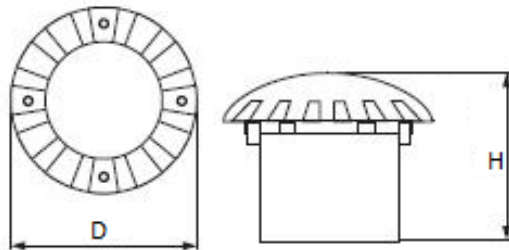

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Size (mm)		Beam angle	Packing /Box (pcs)
					Diameter	Height		
96GRFLED068	1.2	35	6000-6500	grey	100	61	45°	1/40


TECHNICAL SPECIFICATION

FACADE AND GROUND



ELMARK
lighting

96GRFLED068




This luminaire contains built-in LED lamps.

A ⁺⁺	}	L E D
A ⁺		
A		
B		
C		
D		
E		

The lamps cannot be changed in the luminaire.

874/2012



EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 13032-4

